

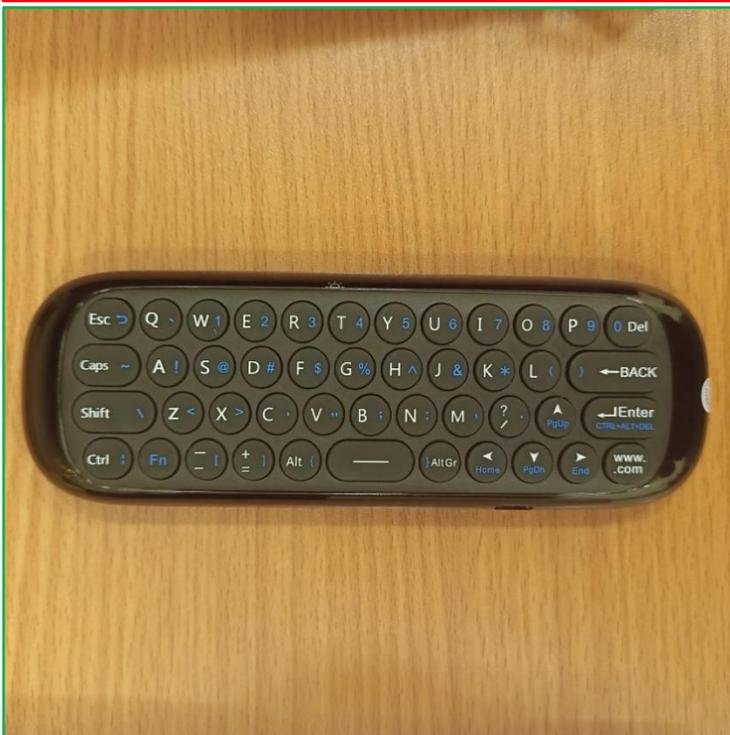


# WeChip W1 2.4GHZ Wireless Air Mouse User Manual

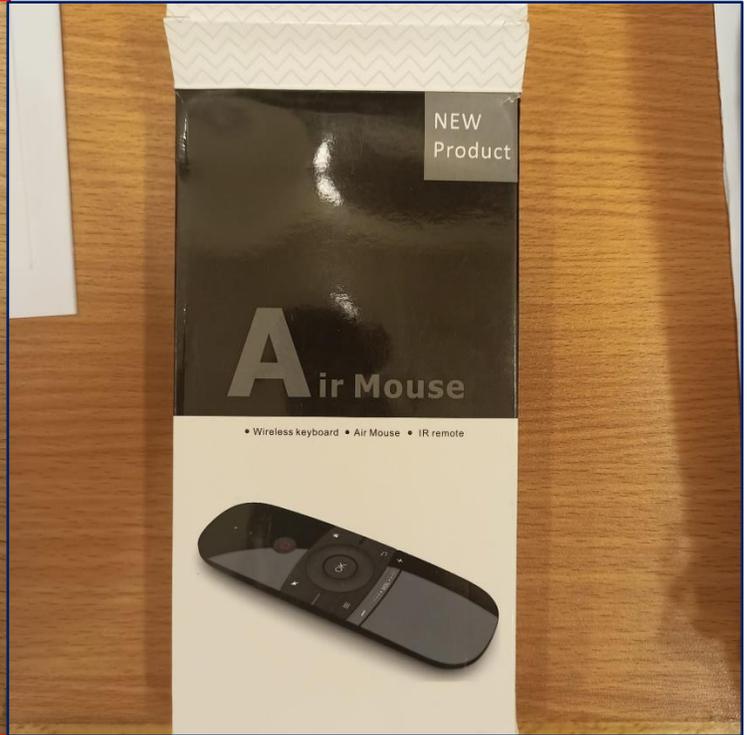

# Overview

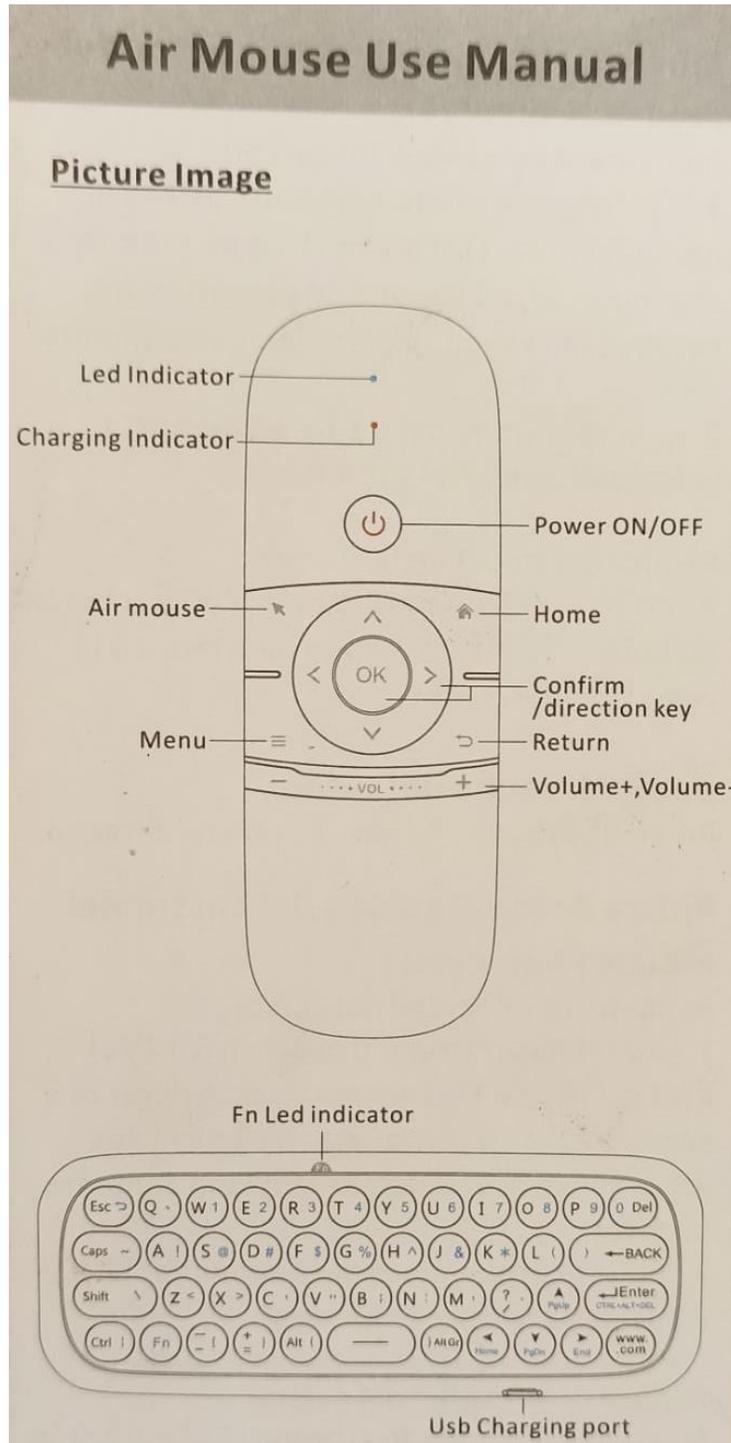

## How to Adjust Mouse Cursor Speed?

Mouse Cursor has 4 adjustment levels.

### Increasing the Speed of Mouse Cursor

- Press and hold the **[OK]** button and volume **[+]** button at the same time for **3** seconds.
- The blue indicator led light will flash twice
- This will speed up the cursor 1 level up
- Repeating this step will increase the cursor speed up to **4** levels

### Reducing the Speed of Mouse Cursor

- Press and hold the **[OK]** button and volume **[-]** button at the same time for **3** seconds
- The blue indicator led light will flash twice
- This will speed down the cursor 1 level
- Repeat the 1<sup>st</sup> step to reduce the speed to a lower level

## Air Mouse Function

- Press  button to turn on the function of the air mouse
- You can use the mouse cursor now
- Press **[OK]** button to confirm what you choose
- Press the  button again to turn off the mouse function.

## Auto Sleep and Wake up Feature

- When you do not use the air mouse remote for 15 seconds, the remote will enter automatic sleep state, the blue indicator light will turn off.
- You can press any button to wake up the remote.

## Right Click Button

Press the  button to right click.

## IR Learning Function

- Press and hold **[OK]** and **[Power]** button on the air mouse at the same time for 3 seconds to keep the blue indicator light on all the time, then press **[Power]** button once, and the blue indicator flashes, the air mouse enters the IR learning mode.
- Place your TV remote and the air mouse on the desk. (Head-to-head, the distance between them should not exceed 3 cm).
- Press one of the buttons on the air mouse first, and press the button (the function you want the air mouse to learn) on your TV remote, then the blue indicator light on the air mouse will flash three times and until it stays bright all the time.
- Repeat the 3<sup>rd</sup> step to make the air mouse learn more functions, otherwise you can go to the 5<sup>th</sup> step.
- Press the **[Power]** button to exit the IR learning mode, the IR Learning function is completed now.

## **Key Board Functionality**

- In the normal mode, the key board will type alphabets.
- To use numeric keypad, press the **Fn** button, the remote will be working on the function buttons (written in blue).
- While using **Fn** button, a small blue led light will be turned on the top of remote.

## **Status of Charging LED light**

- ✓ If the charge LED light is blinking in red color, it means that the battery of the remote is low.
- ✓ The remote will not function properly with low charging.
- ✓ So, it is recommended to use the remote when it is properly charged.

## **Important Notice**

1. The keyboard may not work with some smart TV.
2. If the remote control is not used for a long time or the battery is low, please use it when it is fully charged.
3. This product adapts built-in lithium battery, the charging input voltage is 5V.
4. Please use the specified USB cable to charge the remote control, overcharging the battery will shorten the battery life.
5. The USB dongle is remote specific. One dongle can not work with multiple remotes.