
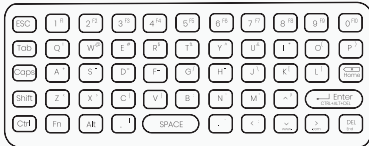


REMOTE MOUSE

Air Mouse • IR Remote • Keyboard

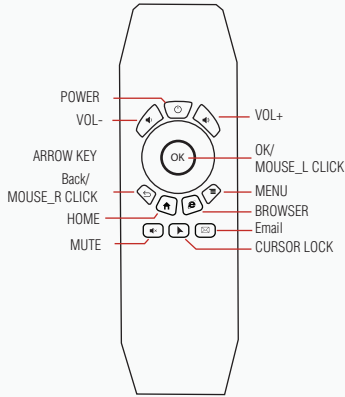

How to Use

Step 1: Plug-in the USB Nano receiver inside the USB port of Smart TV or Joy Box. The system will automatically install the driver software

Step 2: Control the remote mouse cursor on the device by moving it in the air. The movement of the remote mouse controls the direction of the pointer.

Note: You can turn the mouse pointer off by pressing the "CURSOR LOCK" button. Press it again to turn the mouse pointer on.

Auto Sleep and Low Power

After 20 seconds, the remote will go into standby mode. To use the device, press any key. Blinking green light (without any key pressed) indicates low power of the remote mouse. You can recharge it with micro USB Cable.

Bluetooth/Infrared mode

The remote mouse's default mode is Bluetooth. Short press the "OK" + "MENU" button on the remote mouse to switch to Infrared mode. Press it again to switch to Bluetooth mode.

Note: Infrared mode can be used to replace the buttons of TV Remote with Remote Mouse buttons.

Bluetooth Mode: Green Light
Infrared Mode: Red Light

Replacing TV Remote buttons with Remote Mouse

Example: Power Key

Step 1. Short press "OK" + "Menu" button of the remote mouse to switch to infrared mode.

Step 2. After Step A, long press "OK" + "MENU" button for 3 seconds till the red LED of the remote mouse becomes stable.

Step 3. Keep the remote mouse and TV remote head to head within 2cm.

Step 4. Press the Power key of the remote mouse and the red light will start blinking.

Step 5. Then press the power key of the TV remote for 3 seconds.

Step 6. Now you can use the power button of the remote mouse to turn your TV on and off.

Note: You can replace any button of your TV remote with any button of the remote mouse in the similar manner described above.

 **CONTACT US:**
UAN: 111 11 44 44